


# IBOX-708




## Features:

- ◇ All aluminum alloy structure; Fanless design
- ◇ Onboard Intel Q170 chip;
- ◇ Support DDR4 1866/2133 32G memory;
- ◇ Support 1\*MSATA slot, 2\*2.5" SATA;
- ◇ Optional No expand slot, 2 expand slot, 4 expand slot
- ◇ Support 6\*COM □ (Two optional RS232/422/485)
- ◇ Support DC 9~36V , Support positive and negative connector reverse protection;
- ◇ Applied OS:



## Specification

Model	IBOX-708
Color	Titanium gray (Color can be customized)
Material	High quality aluminum alloy+ sheet metal structure
Processor	Intel Core i3 6100T (Dual core four threads, 3.2 GHz) Intel Core i5 6500T (Quad core four threads, 2.5 GHz, Max turbo 3.1 GHz) Intel Core i7 6700T (Quad core eight threads, 2.8 GHz, Max turbo 3.6 GHz)
Memory	Support 2* DDR4 1866/2133 SODIMM memory slot, Max 32GB
BIOS	AMI EFI BIOS
Display Chip	Integrated Intel HD Graphics 530
Display Port	1* VGA, 1*HDMI, 1*DP(Support synchronous/asynchronous three display)
Front I/O	8*USB3.0, 2 *Intel 1000M LAN , 1*Power Switch, 1* Mic, 2* Speak port, 6* COM (COM1、2 Optional RS232/422/485) , 1* DC Power phoenix terminal 1*VGA , 1*HDMI, 1*DP
Rear I/O	Support 1*MINI PCIE slot (Support WIFI/3G/4G) , Embedded SIM Slot Support 1*MINI PCIE slot (Support MSATA/3G/4G) , Embedded SIM Slot Optional (Standard version doesn't include these ports) : 16 bit GPIO port, 4*USB2.0
Expansion Slot	1*PCIE X16 slot + 1*PCIE X4 slot + 2*PCI slot, Extension Cards : support 210 mm Optional expand slot: 1*PCIE X16 slot + 1*PCIE X4 slot
Network	2*Intel i211-AT, 1*Intel i219-LM 1000M LAN (Support Vpro skill)
Storage	Support 1*MSATA , 2*2.5" SATA (Support RAID0/1)
Power Supply	DC 9~36V wide voltage Input, Support positive and negative connector reverse protection
Other function	Auto power on when there is electricity、Timing boot、Wake on LAN、PXE boot、Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0℃ ~ +50℃ (Commercial HDD) , -20℃ ~ +60℃ (Industry SSD) , Surface air flow
Work Humidity	5% ~ 95% non-condensing
Certificates	CE、CCC、 FCC Class A、 ROHS
Size	210 * 240 * 173 mm 【NO VESA Mount】
Weigh	5.2 kg 【No VESA Mount】
Application	Industrial Automation, Medical, Logistics Transportation, Warehouse, Electronic Education etc.

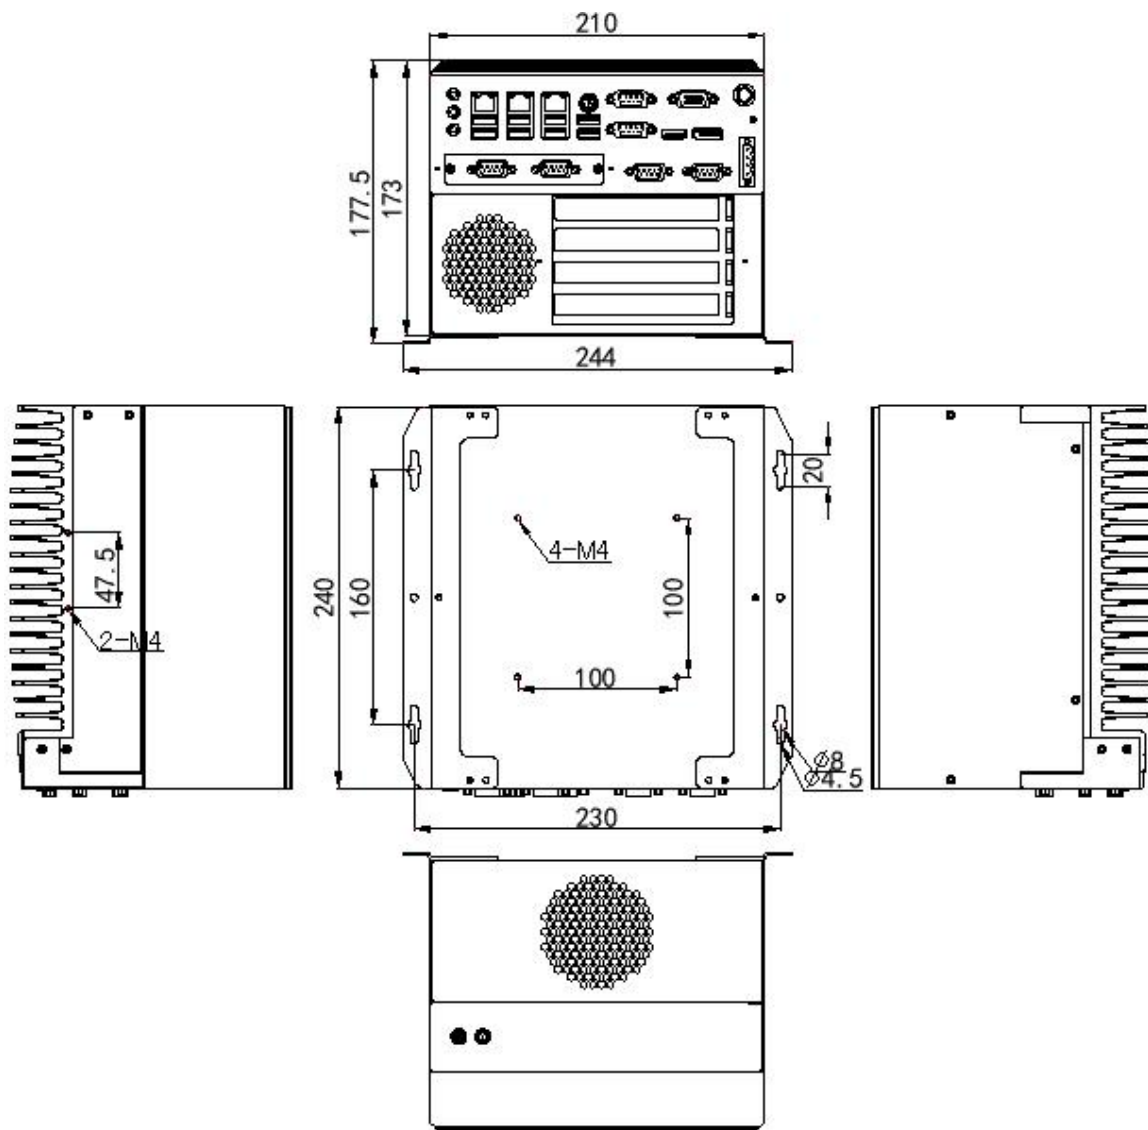

## Accessories List

Name	Quantity	Specification
Power Adapter	1	Optional 12V 7.5A/12V 10A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
Certificate of approval	1	Logo/Neutral
Warranty card	1	Logo/Neutral
VESA mounts	2	Standard
CD Driver	1	Neutral

## Order information

IBOX-708A	Extended slots: 1 PCIE X16 slot + 1 PCIE X4 slot + 2 PCI slots
IBOX-708B	Extended slot: 1 PCIE X16 slot + 1 PCIE X4 slot
IBOX-708C	No expansion slots